

1.1				ч	ч		ч	ч		ш
1.2				ч	ч					
ч	GB 50058 Э						Ю ч GB 5226.1 Э			Ю ч
GB/T 3811 Э		Ю		ш						
1.3										
				ч	ч			ч		ч
	ш									

2.1

2.2

ччччч

2.3

ч

2.4

ш

2.5

ш

3.1

220/380V ± 10% 50Hz ± 1%

3.2

чч

3.3

шчч

1		7	
2		35	
3		ч	
4		5	
5		5	

5.1

ш + / чччш

5.2

Ў 800 kg (4 + +)ш

5.3

5.7

①	Sa2.5				
②	(	ű 70 í m)			
③	(	ű 100 í m)			
④	(	ű 70 í m)			
⑤	ű 240 í m	Ш			
⑥			4	4	C5 4



4

Ш

⑦

Ш

1

Ex d IIB T4 Gb

4

IE3

2


3

4

5

6

7

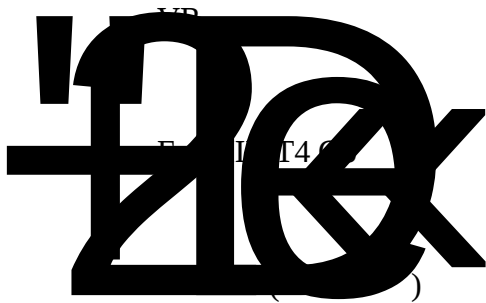

Ћ IP55

Ч

Ž

ž

Ч

Ч

Ш

Ш

Т ъ

24

Ш

Ÿ

2

24

Ш

Ž

Џ 10

Ч

Ч

Ш

Т

10.1

5

Ш

10.2

Ш

4 4

- | | | | |
|-------|----|---|---|
| 1. | 15 | Ш | |
| 2. 2. | | | Ш |
| 3. 3. | | | |